


Anvil™
(Owen™ Type)

M

GENERAL PURPOSE CLAMSHELL BUCKETS

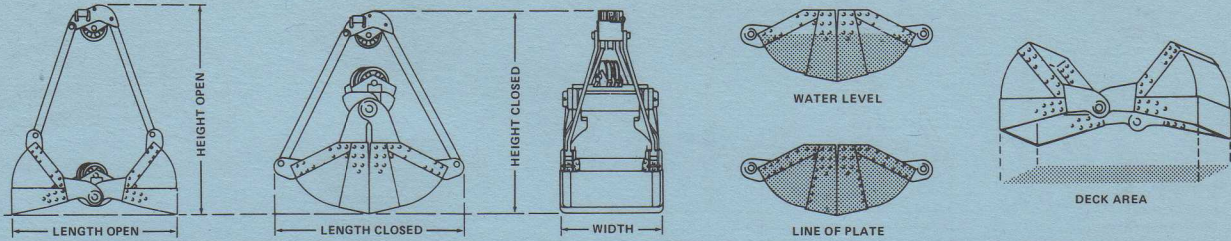

SPECIFICATIONS

SIZE NUMBER		*23	*19	*123	*26	*223	*126	30	130	230	36	136	236
RATING – CU. YDS.		1/4	3/8	3/8	3/8	1/2	1/2	1/2	5/8	3/4	3/4	1	1-1/4
CAPACITY – CU. FT.	Water Level	5.8	9.0	8.1	8.1	12.4	12.4	12.0	14.1	17.6	16.9	25.0	31.8
	Line of Plate	7.5	11.4	11.0	11.0	15.4	15.5	15.8	17.8	21.1	21.3	29.0	35.5
DECK AREA – SQ. FT.		10.4	11.1	12.3	12.8	13.1	14.6	16.2	16.7	17.8	20.0	22.2	24.0
DIMENSIONS	Width Outside	2'1"	1'9"	2'1"	2'4"	2'1"	2'4"	2'8"	2'8"	2'8"	3'2"	3'2"	3'2"
	Length Open	5'0"	6'4"	5'11"	5'6"	6'4"	6'3"	6'1"	6'3"	6'8"	6'4"	7'0"	7'7"
	Length Closed	4'2"	5'11"	5'1"	4'8"	5'10"	5'6"	5'9"	5'9"	6'8"	5'10"	6'6"	7'1"
	Height Open	5'8"	7'9"	6'6"	6'1"	7'5"	7'5"	7'4"	7'7"	7'9"	7'10"	8'7"	8'10"
	Height Closed	4'6"	6'1"	5'2"	4'10"	5'9"	5'9"	5'9"	5'9"	6'0"	6'2"	6'10"	6'11"
SHEAVES	No.	4	4	4	4	4	4	5	5	5	5	5	5
	O.D.	8"	10"	8"	8"	10"	10"	10"	10"	10"	12"	12"	12"
ROPE	Standard Diameter	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	3/4"
	To Reeve - Open	25'	33'	28'	26'	33'	32'	40'	40'	40'	43'	45'	48'
	Pulled Out To Close	16'	13'	18'	16'	21'	20'	23'	24'	26'	25'	28'	30'
BOTTOM TEETH – QTY.	Square Nose	5	5	5	6	5	6	6	6	6	7	7	7
	Round Nose	5	5	5	7	5	7	7	7	7	7	7	7
WEIGHT – SQ. NOSE	Bucket Only	1,330	2,220	1,440	1,540	2,155	2,370	2,550	2,600	2,720	3,470	3,690	3,890
	Bottom Teeth	150	150	150	180	150	180	240	240	240	280	280	280
	With Std. Cwt. and Teeth	1,680		1,790	1,960	2,580	2,750	3,040	3,090	3,210	4,140	4,360	4,560
	With Hvy. Cwt. and Teeth						2,850	3,170	3,220	3,340	4,435	4,655	4,855

SPECIFICATIONS

SIZE NUMBER		140	146	146-A	246	160	260	266	466	672	72	272	478
RATING – CU. YDS.		1-1/4	1-1/2	1-3/4	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6
CAPACITY – CU. FT.	Water Level	30.9	38.8	43.5	48.3	59.0	65.0	75.5	88.5	95.7	105.5	115.6	125.0
	Line of Plate	36.1	45.8	52.3	58.1	77.8	86.5	98.0	110.0	125.0	136.5	150.5	164.0
DECK AREA – SQ. FT.		25.4	34.7	36.4	38.1	49.9	52.9	63.5	67.5	73.3	76.5	79.2	85.5
DIMENSIONS	Width Outside	3'6"	4'1"	4'1"	4'1"	5'3"	5'4"	5'10"	5'10"	6'4"	6'4"	6'4"	6'10"
	Length Open	7'3"	8'6"	8'11"	9'4"	9'6"	9'11"	11'0"	11'7"	11'7"	12'1"	12'6"	12'6"
	Length Closed	3'11"	7'0"	7'5"	7'9"	8'1"	8'11"	8'8"	9'3"	9'3"	9'8"	10'2"	10'2"
	Height Open	9'1"	9'8"	10'1"	10'9"	11'2"	12'0"	12'9"	13'4"	13'8"	14'1"	14'6"	14'10"
	Height Closed	7'2"	7'8"	8'1"	8'8"	9'0"	9'3"	10'11"	11'2"	11'6"	11'10"	12'1"	12'6"
SHEAVES	No.	5	5	5	5	5	5	5	5	5	5	5	5
	O.D.	14"	14"	16"	16"	18"	18"	23"	23"	25"	25"	25"	28"
ROPE	Standard Diameter	7/8"	7/8"	7/8"	7/8"	1"	1"	1-1/8"	1-1/8"	1-1/4"	1-1/4"	1-1/4"	1-3/8"
	To Reeve - Open	48'	50'	52'	53'	56'	60'	71'	73'	76'	77'	78'	83'
	Pulled Out To Close	30'	31'	33'	35'	30'	34'	40'	42'	43'	44'	46'	46'
BOTTOM TEETH – QTY.	Square Nose	7	8	8	8	9	9	9	9	9	9	9	9
	Round Nose	7	7	7	7	9	9	9	9	9	9	9	9
WEIGHT – SQ. NOSE	Bucket Only	4,285	5,520	5,910	6,030	7,000	7,600	12,040	12,335	14,285	16,150	16,750	18,200
	Bottom Teeth	385	440	440	440	495	495	850	850	850	945	945	945
	With Std. Cwt. and Teeth	5,140	6,540	6,930	7,050	8,315	8,915	14,040	14,335	16,585	18,545	19,145	20,945
	With Hvy. Cwt. and Teeth	5,460	7,150	7,540	7,660	8,725	9,325	14,615	14,910	17,335	19,295	19,895	21,845

*Square nose and round nose buckets marked with an asterisk can be furnished with five instead of four closing sheaves for additional digging power. Add approximately 100 pounds to the weight of the bucket.

The above data is for square nose buckets. Information for round nose buckets is approximately the same.

Because of normal variances in the material used, the weight of an actual bucket may vary slightly from that listed in the data table.

Sheaves, sockets and wedges provided for rope size as shown above unless otherwise specified.

ANVIL™ OWEN™ YAUN-WILLIAMS™



attachments

Engineered and marketed by

INTERGY, INC.



RPI Equipment, LLC
26 W Main Street
Mount Ephraim, NJ 08059

rpiequipment.com
(856) 456-0081 • office
(856) 742-1994 • fax